


RJ-88SC and RJ-88HT Self-Contained Compactor/Container

Dimensions and Specifications

Charge Box Capacity			
[Mfr. Rating]	1.0 cu yd	0.76 m ³	
[WASTEC Rating]	0.70 cu yd	0.54 m ³	
Clear Top Opening	30.5"L x 48"W	775mm x 1219mm	
Performance Characteristics:			
Cycle Time	44 sec.	44 sec.	
Total Normal Force	36,600 lbs.	163 kN	
Total Maximum Force	43,100 lbs.	192 kN	
Normal Ram Face Pressure	34.7 psi	239 kPa	
Maximum Ram Face Pressure	40.8 psi	281 kPa	
Ram Penetration	6"	152mm	
Electrical Equipment:			
Electric Motor 3/60/230-460	5 hp	3.7kW	
Electric Control Voltage	120 VAC	120VAC	
Panel Box Assembly			
UL® and CUL® Listed	Key Operated	120 VAC	
All Circuits Fused	2 Push Button Station Start/Stop		
Hydraulic Equipment:			
Hydraulic Pump	6 gpm	23 L/min	
Normal Pressure	1700 psi	117 bar	
Maximum Pressure	2000 psi	138 bar	
Hydraulic Cylinders (2) - Bore	4"	102mm	
- Rod	2.5"	64mm	

RJ-88SC	A	В	C	D**	E	WT.
15 cu yds	43"	30 1⁄2"	70"	187"	89"	7,200 lbs.
	1092mm	777mm	1778mm	4750mm	2261mm	3265 kg
20 cu yds	43"	30 1⁄2"	70"	222"	89"	7,700 lbs.
	1092mm	777mm	1778mm	5639mm	2261mm	3493 kg
24 cu yds	43"	30 1⁄2"	70"	256"	89"	8,100 lbs.
	1092mm	777mm	1778mm	6502mm	2261mm	3674 kg
RJ-88HT	А	В	C	D**	E	WT.
15 cu yds	44"	30 1⁄2"	70"	216"	95"	7,700 lbs.
	1092mm	777mm	1778mm	5486mm	2413mm	3493 kg
20 cu yds	44"	30 ½"	70"	250"	95"	8,100 lbs.
	1092mm	777mm	1778mm	6350mm	2413mm	3674 kg
24 cu yds	44"	30 ½"	70"	284 ½"	95"	8,490 lbs.
	1092mm	777mm	1778mm	7226mm	2413mm	3851 kg
Overall height w						

 Overall height with hydraulic tailgate raised: 16'6". Hoist should be equipped with selector valve (1500 psi minimum) in order to control hydraulic tailgate.
** Other lengths available. Call factory for details.

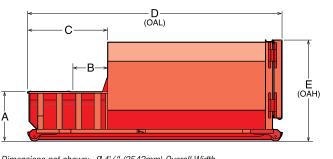

Dimensions not shown: 8 41/4" (2543mm) Overall Width Ground Roller Widths: 61 1/4" (1569mm) Inside Rollers 67 3/4" (1712mm) Roller Centers 72 1/4" (1851mm) Outside Rollers

Compactor Rental and Leasing Programs Available

For detailed specifications, recommendations, or free economic studies comparing various systems, contact Marathon Customer Care at **1-800-633-8974**.



COMPANY	Marathon Equipment Company P.O. Box 1798 Vernon, AL 35592-1798 800.633.8974 www.marathonequipment.com		Environmental Solutions Grou A - INVER COMMANY WWW.doveresg.co
	NJPA Contract #060612-ESG	GSA	F Yo
erature	are illustrative only. Specifications are subje	ct to change without notice in order	Tut

Authorized Dealer:



Sı

Fo

Th

-

H d in

На



Stationary and self-contained compactors

GREEN BUILT

Also available as Green Built[®], featuring Solar

or 5 hp high-efficiency power units and other

environmentally friendly components

Pictures in this literature are illustrative only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Certified in compliance with ANSI standard Z245.2, applicable OSHA Regulations, and certified under WASTEC's Stationary Compactor Certification Program. Products must be used with safe practice and in accordance with said regulations and standards.


© 2013 Marathon Equipment Company. All rights reserved. Printed in USA. | SWS-M00115-010713




You can add the Pandora Remote Monitoring System to many of our most popular compactors. Pandora enables you to measurably reduce your waste management costs. To find out more, contact your Marathon representative today.

Pandora Platform Functionality

Optional on all RJ-88SC Compactors



RJ-88SC Compactor with PLC and wireless modem

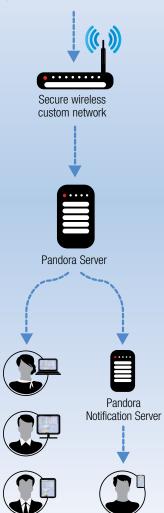

- Pandora can display daily equipment status on a desktop or mobile PC, tablet, or smart phone
- ${\bf V}$ Staff can login from any desktop or wireless device
- Pandora can send notifications to superintendent or directly to haulers



RJ-88SC and RJ-88HT Self-Contained Compactor/Container



- alls
- opping center.
- niries
- rge restaurants
- Cafeterias
- -flight kitchens
- Supermarkets
- Food processors
- eme parks/ sorts
- spitals and stitutions
- tels and motels









SELF-CONTAINED COMPACTORS

Ouik Clean® Tank

Full door seal with P-Seal

CYNCON Life-Xtender[®] Cvclic **Control System**

Load from both ground and dock level

RJ-88SC and RJ-88HT Compactors with 15, 20, and 24 Cubic Yard Capacity Container

Marathon Engineering

Marathon's RJ-88SC self-contained compactor/container is ideal for waste with high liquid content. Each RJ-88SC stores liquid and helps control insects and odor problems. Each container is factory tested and certified to be free from leaks. With standard double-end pickup, the RJ-88SC can be loaded for hauling from either end. This is especially useful if installed perpendicular to a dock. The RJ-88HT is equipped with a hydraulic tailage, which makes it particularly well suited for security chute-fed and dock-fed applications where maneuvering space for a collection vehicle is limited. The compactor is built into the same door through which the compacted refuse is later emptied, eliminating the need for the additional space needed for the time-consuming double "turn-around" maneuver required for conventional self-contained models.

P-Seal

The P-shaped **Door Seal** is specially designed for portable compaction containers to provide a superior watertight closure. The mounting is engineered for guick and easy installation when replacement is necessary, requiring no field fitting, cutting, or welding.

Double-Hinge with Bronze Bushing

Every RJ-88SC is tested for watertightness before leaving the factory. Liquid retention is

ensured by Marathon's Double-Hinge. It creates uniform seal compression while eliminating the seal "scrubbing" and damage so often encountered with competitive designs. The **Double-Hinge** also saves expensive driver and truck time because only one easy-to-operate ratchet makes it work.

P-Seal

Bubble Gate and Auto Relatch

The innovative "Bubble Gate" adds a full cubic yard to container capacity. Superior compaction ratios result from its special curved shape. These two unique benefits reduce costs of disposal.

The ultimate in latch systems, Marathon's "Auto Relatch" eliminates the need to hold the door while operating the latch ratchet. This design enables the **Bubble Gate** operator to use both hands on the ratchet. Auto Relatch







Double-Hinge




Marathon's Remote Power Pack, separate from the compactor/container, remains free of damage caused during hauling to and from disposal sites and free of problems caused by landfill dust. No electrical connections to make or break — two simple-to-use, hydraulic quick disconnects couple the power unit to the packing head. Weather Cover and the UL® & CUL® listed Motor Control Panel are standard equipment.

All Marathon Remote Power Packs are built in-house to our quality standards and each unit must pass a series of stringent tests before it can be shipped with the selected compactor.



The optional doghouse offers a totally enclosed charge box with heavy-duty "T" handle latches.

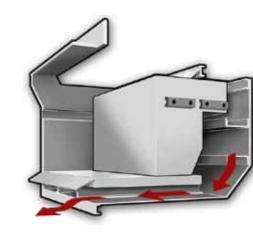

The Qwik Clean[®] Tank feature, standard on all RJ-88SC compactors, funnels any liquid seepage which can occur during compaction into an enclosed area underneath the charge box floor. The liquid is automatically discharged at the disposal site, in effect flushing the container and the area behind the ram. The 12-inches (305mm) high, 750-gallon (2839 liters) capacity sump area is designed to provide easier hook access for roll-off drivers.



Images shown with optional equipment

For more information or to order, call 1-800-633-8974 or visit us at www.marathonequipment.com.



SELF-CONTAINED COMPACTORS

CYNCON Cyclic Control System

Standard on all **RJ-88SC Compactors**



- V Reliable, solid state circuitry eliminates all pressure and limit switches
- V CYNCON's no-shock cycle control extends cylinder and hose wear life
- v Automatic "container full assurance system" — the ram dwells against the load at full pressure, resulting in better compaction
- v Smoother running, guieter operation
- v Advanced hydraulic design enables the system to operate at minimum pressure levels except when actually packing solid waste
- More accurate Advanced Warning or Container Full options
- ✓ Dramatically improved cold weather performance



Pandora Remote Monitoring System

The revolutionary Pandora Remote Monitoring System from Marathon enables you to monitor your compaction and baling equipment remotely, right from your desktop or mobile device using integrated wireless communications. The Pandora system combines onsite factory built-in or external add-on hardware with an industry-leading software platform – Pandora Intelligent Networks™ - to give you, real-time compactor and baler data, 24 hours per day, seven days per week.

Pandora gives you the tools to optimize your equipment and measurably reduce your waste management costs. You can eliminate unnecessary pickups, service your equipment to prevent downtime, and substantially reduce your overall carbon footprint.

View the Compactor

- V Check performance
- V Monitor fullness
- V Identify misuse

Manage the Network

- V Automate the scheduling of pickups and service calls
- **v** Track performance trends
- V Identify and address areas of inefficiency

Stav Connected

- **v** Receive email or text alerts on your mobile device
- V Communicate important decisions from any location
- V Automatically escalate missed pickups or service call notifications

Repairs

- V Schedule service before costly breakdowns
- **v** Keep equipment operating at peak efficiency
- **V** Receive malfunction and online alerts
- V Reduce service and replacement costs

Metrics

- V Create a custom dashboard to view equipment data and analyze operating trends
- **v** Identify ways to enhance performance

Pickups

- Automatically notify the hauler when compactors reach their desired fullness level
- V Pay only for necessary pickups